


GATOR DUST

**THE INDUSTRY'S MOST ASKED FOR PRODUCT
FOR NATURAL STONE JOINTS**

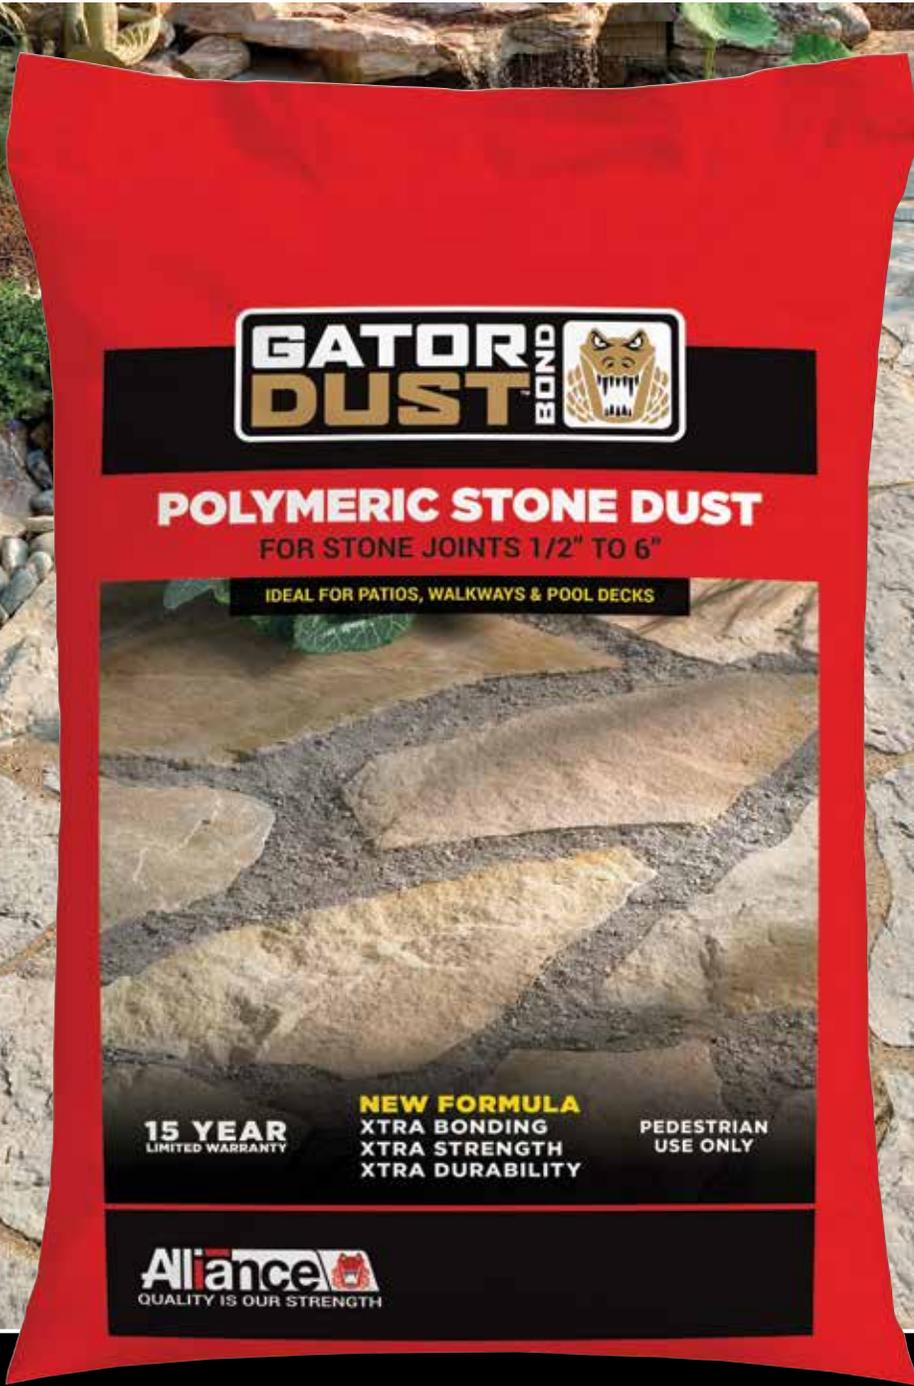

15 YEAR
LIMITED WARRANTY

NEW FORMULA
XTRA BONDING
XTRA STRENGTH
XTRA DURABILITY

**FOR PEDESTRIAN
USE ONLY**

Exclusive Unique Colors



Sahara Beige Slate Grey

GATOR DUST BOND is a unique mixture of polymer binders and calibrated stone available in Sahara Beige, Stone Grey. Once **GATOR DUST BOND** sets, it becomes very firm and locks between the stone joints while still retaining flexibility and providing a long lasting, durable jointing material. **GATOR DUST BOND** is recommended for a variety of uses including pool decks, patios, footpaths, and any other pedestrian applications.

FEATURES


- Product works at above 59°F (15°C)
- Compatible with all types of wetcast and natural stones
- **GATOR DUST BOND** is ideal for joints that are a minimum of 1/2" (1.25 cm) to a maximum of 6" (15 cm) wide
- Does not haze stones
- For pedestrian use only

COVERAGE

The quantity required depends on the shape and size of the stones as well as the width of the joints. One bag of 50 lbs (22.7 kg) of this product will cover between 20 to 30 square feet (1.86 to 2.79 square meter) if the joints are about 1" to 2" (2.54 to 5.08 cm) wide and the stones are about 2" to 2-1/2" (5.08 cm to 6.35 cm) thick.

FOR USE ON AND REQUIRED SUB-SURFACE PREPARATION

GATOR DUST BOND is recommended for a variety of uses, including patios, walkways and pool decks. The stones must be installed on a drainage base system: maximum of 1" (2.5 cm) of bedding sand, plus a minimum of 6" (15 cm) of crushed stone compacted at 98% Proctor density. (See diagram below.)

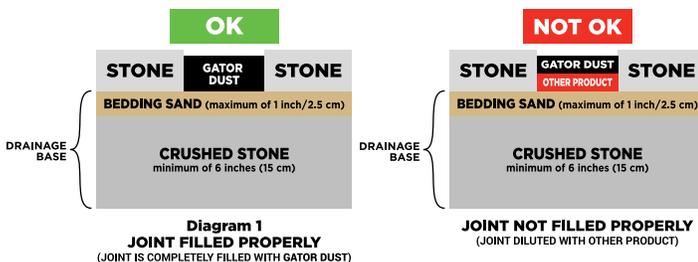

PREPARATION INFORMATION (Important Notes)

- GATOR DUST** must be installed above 59°F (15°C).
- GATOR DUST** can only be installed if rain is not forecasted in the next 24 hours.
- Wetcast & natural stone sides and top surfaces must be completely dry. Do not apply if the tile surface is damp or wet. The damp or wet surface will cause **GATOR DUST** to prematurely activate and will lead to the polymers sticking on the tile surface.
- Do not apply if the tile stone joints are damp or wet. This will prevent the **GATOR DUST** from properly sliding into the joints and obtaining very densely packed joints, which is critical to the products performance.
- Minimize or avoid walking on the stones for 24 hours after the installation of **GATOR DUST**.
- If **GATOR DUST** is left lying on the stone surface for a long duration, moisture can form and will activate the **GATOR DUST** on the stone surface, staining may occur.
- Do not use **GATOR DUST** when the stones are installed over a concrete base. **GATOR DUST** is designed to function on a drainage base system (see diagram 1 above). A concrete base inhibits drainage, thus the trapped water will negatively impact the product's performance.
- Individual bags must be kept in dry storage.

GATOR DUST INSTALLATION STEPS FOR A NEW STONE SURFACE OF WETCAST AND NATURAL STONES

- 1 Install the stones on a maximum 1" bed of sand. Make sure that there is at least 6" of compacted crushed stone under the bedding sand. See diagram 1 above.
- 2 Make sure the stone's top surface is dry.
FOR NATURAL STONES: Using a hard-bristle broom, sweep **GATOR DUST** in between the full depth of the natural stone joints.
FOR WETCAST STONES: Using a scoop, carefully pour **GATOR DUST** in between the full depth of the joints and avoid getting any **GATOR DUST** on the wetcast stone surface.
- 3 Hit the stones with a rubber mallet; this will make the **GATOR DUST** settle firmly into the joints by removing any air pockets. Repeat step 2 and this step 3 at least two more times.
- 4 Using a soft, fine-bristle broom, sweep all excess **GATOR DUST** off stone surfaces. Ensure that **GATOR DUST** lies at least 1/8 inch below the top of the stones.
- 5 Using a leaf blower, blow all **GATOR DUST** residues off stone surfaces.

WATER ACTIVATION (Important Notes)

- A Work in manageable sections, ideally about 100 sq. ft. at a time, depending on temperature.
- B Do not allow **GATOR DUST** to wash out of joint.
- C Never allow paved surface to dry out during the water activation phase.
- D Watering must be started at the lowest point of the paved surface.
- E Use a watering gun connected to a hose. Setting should be set to shower.

GATOR DUST WATER ACTIVATION STEPS

- 6 Shower water on a specific water area of 100 sq.ft., wait no longer than 2 to 3 minutes. Proceed to STEP 7.
- 7 Shower and rinse simultaneously on a section of approximately 100 sq.ft. so as to eliminate any **GATOR DUST** residue left on the stones. Any **GATOR DUST** residue should go directly into the stones joints. Wait no longer than 2 to 3 minutes. Proceed to STEP 8.
- 8 Shower and rinse simultaneously, so as to eliminate any **GATOR DUST** residue. Any residue should go directly into the stones joints. However, stop showering when you see water retention on the stones joints. Wait no longer than 2 to 3 minutes. Proceed to STEP 9. Note: Repeat the directions of STEPS 6 to 8 for all other areas that have not been showered with water.
- 9 Use a leaf blower to remove any excess water remaining on the stones pores and crevices. This blowing action is necessary to help remove any remaining **GATOR DUST** residue left on stones surfaces from the previous steps.

IMPORTANT

The water used in step 6 will activate a bonding action as well as condensing **GATOR DUST** in the joints. Too much water will undo the dense compaction obtained during step 3 and reduce the final performance of **GATOR DUST**.

PLEASE NOTE

GATOR DUST becomes very firm but will detach from stone if the crushed stone base has excessive movement. It will also detach from the stone if the stones are oscillating back and forth due to improper installation. By following **GATOR DUST** installation instructions carefully, you will obtain a very hard jointing material. It should be noted that **GATOR DUST** will continue to harden over time. Avoid excessive watering or flooding of stone areas. When installing stones around an underground pool, a slope of 1/8 inch (3 mm) per linear foot (30 cm) away from the pool is mandatory. All stone surfaces must have a drainage slope for the **GATOR DUST** to work at its optimum. For the pool coping blocks, it is mandatory to use mortar in the joints. For the rest of the stone installation around the pool, you can use **GATOR DUST**. Do not sweep **GATOR DUST** over asphalt.